

# Dual 7" 3RU Rack Monitors

Perfect 3G-SDI Monitoring with Broadcast Quality for Live Events & Shows

LILLIPUT®

## 3RURackMonitors

Broadcast quality 3G-SDI rack monitors that make settings changed with great convenience.



Model No.: RM-7028S

With dual 7" IPS screens, viewing SD, HD and 3G-SDI video on 3RU rack monitor.

1280×800

Metal Housing

- 178° wide viewing angles
- High brightness: 400cd/m²
- High contrast: 800:1
- Faster response time
- TALLY interface with indicating light
- Firm & thin design



### Intelligent SDI Monitoring

Lilliput 7" 3RU rack monitors are the best solution for high quality SDI monitoring! They have a various of use for broadcast, on-site monitoring and live broadcast van, etc! As well as setup a video wall of rack monitors in control room and see all the scenes. A rack for a customized monitoring solution also can be supported for viewing different angles and images displays.



### Perfect Dual Monitoring

Because of better filtering and scaling advantages, Lilliput's 3RU rack monitors are really suitable for broadcast quality monitoring system. With high quality SD, HD & 3G-SDI inputs, make sure that precise color can be controlled under multiple displays conveniently. Highly integrated Tally port and Tally description, which are ideal for large broadcast systems.




### Smart Ethernet Control

Using laptop, Mac or PC to set and adjust each monitor easily with relevant softwares via ethernet network.




### Excellent Display & Design

Lilliput's dual 7" rack monitors feature two attractive IPS panels, which with 1280x800 high resolution, 178° wide viewing angles, high brightness & contrast, and faster response time; that providing excellent viewing experience. Metal & thin housing design is also welcomed by live events and shows.

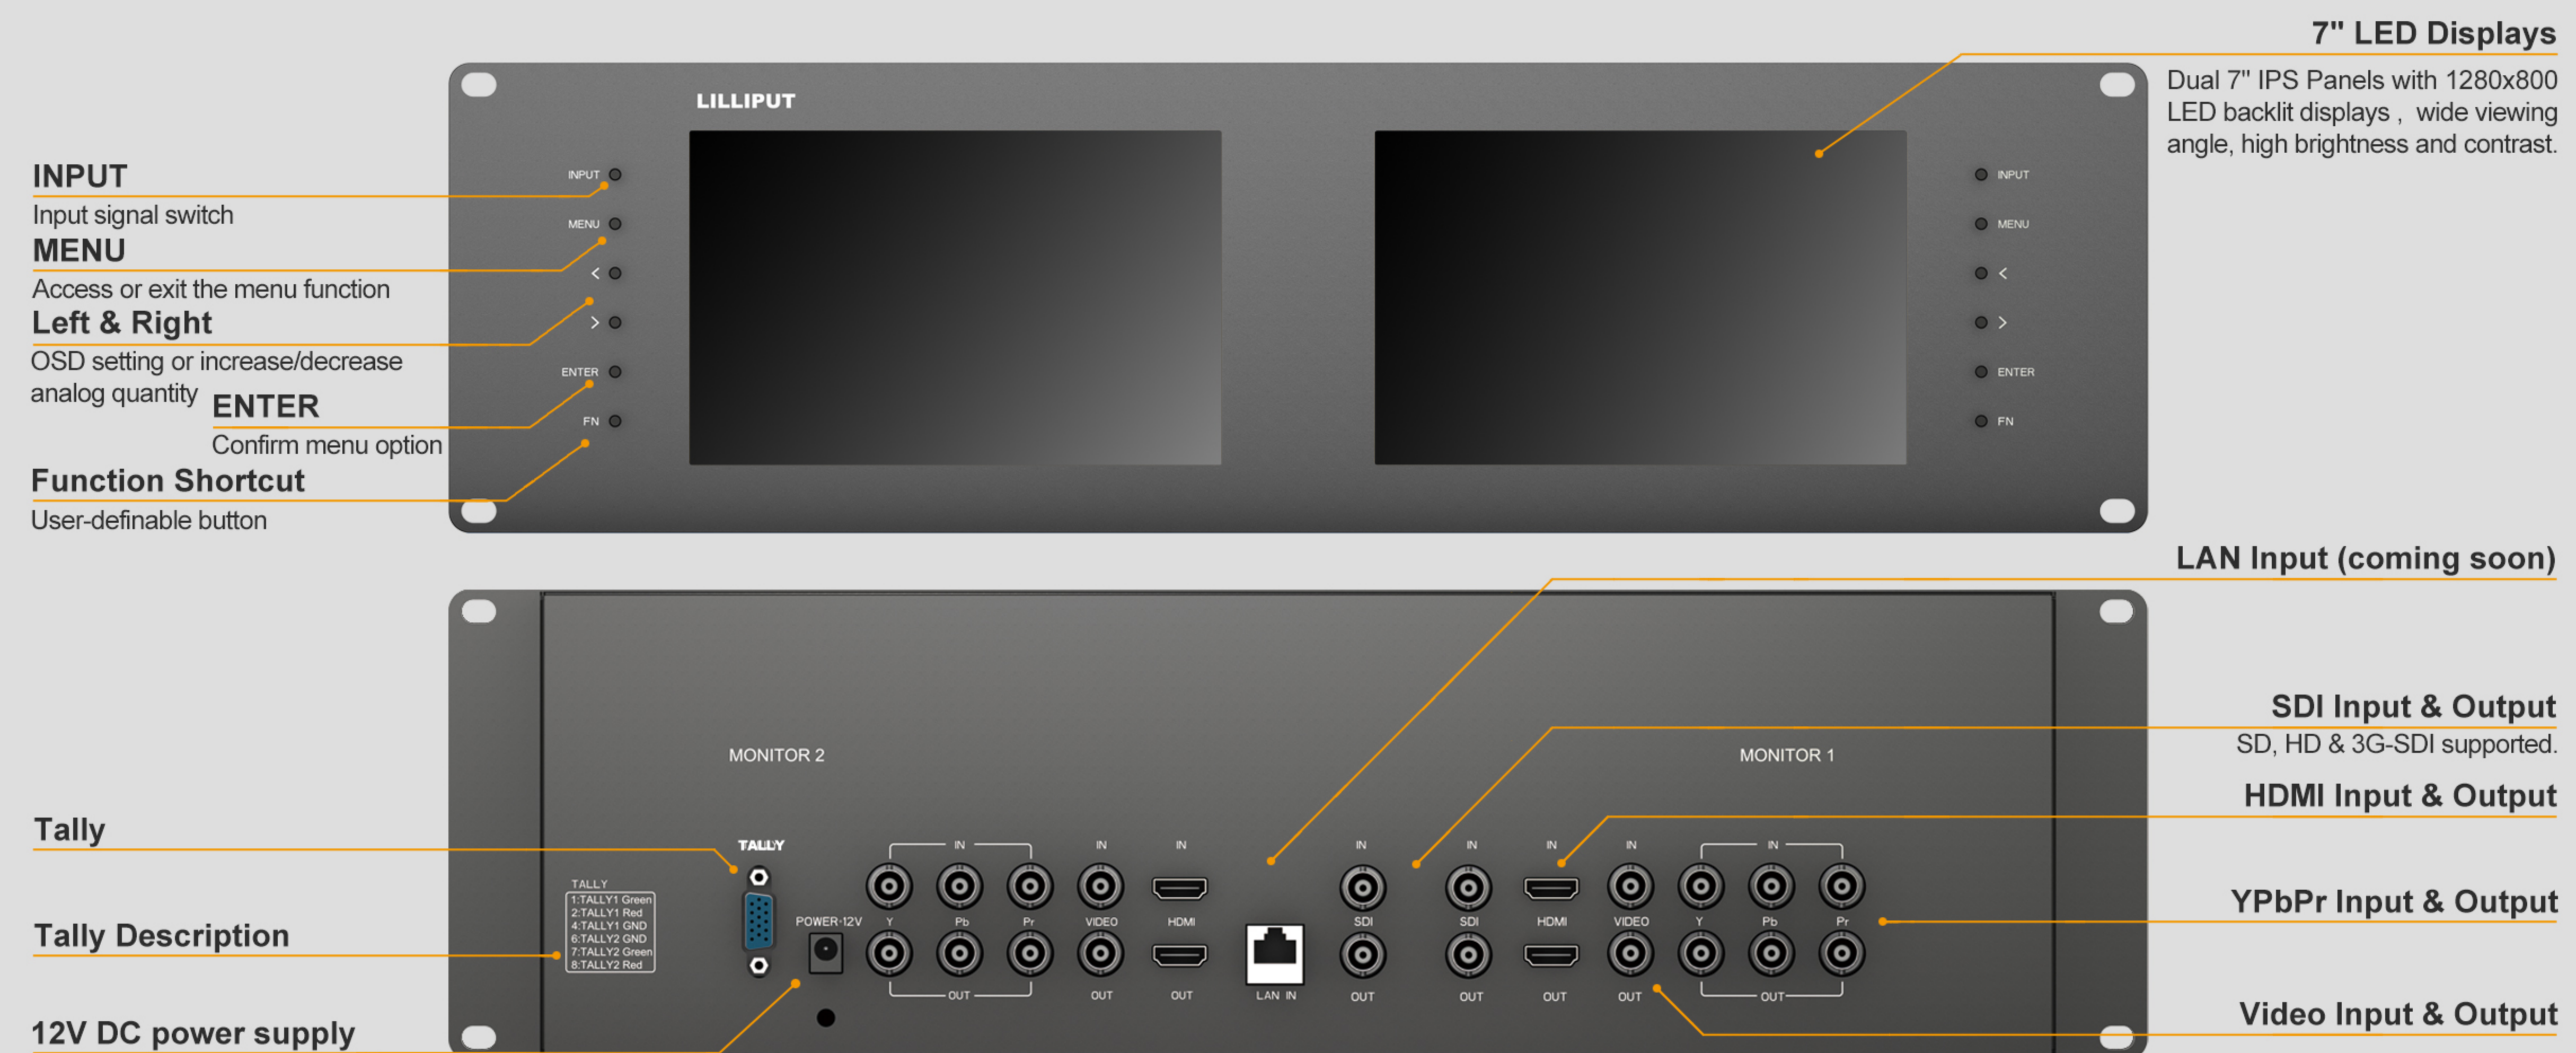

	Panel	Dual 7" LED IPS
<b>DISPLAY</b>	Physical Resolution	1280×800, support up to 1920×1080
	Aspect Ratio	16:9
	Brightness	400cd/m2
	Contrast	800:1
	Viewing Angle	178° / 178°(H/V)
	<b>INPUT</b>	3G-SDI
HDMI		2
YPbPr		6(BNC)
Composite		2
TALLY		2
LAN		1
USB 2.0		1(mini)
<b>OUTPUT</b>	3G-SDI	2
	HDMI	2
	YPbPr	6(BNC)
	Composite	2
<b>POWER</b>	Current	1500mA
	Input Voltage	DC 12V
	Power Consumption	≤18W
<b>ENVIRONMENT</b>	Operating Temperature	-20°C~60°C
	Storage Temperature	-30°C~70°C
<b>DIMENSION</b>	Dimension(LWD)	482.5×133.5×25.3mm
	Weight	2885g


ACCESSORIES SPECIFICATIONS

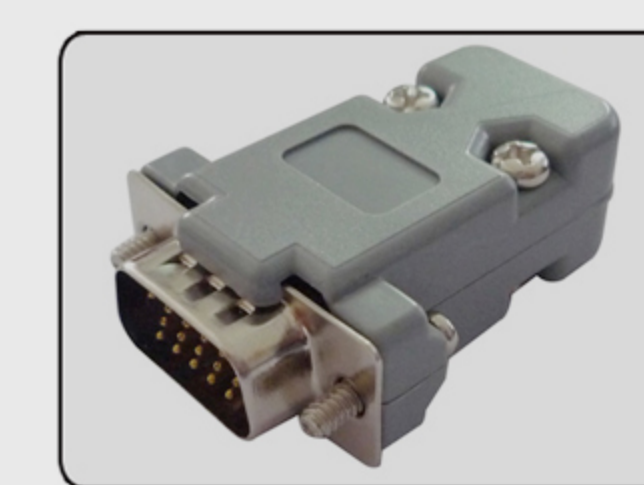

TALLY connector



12V DC adapter

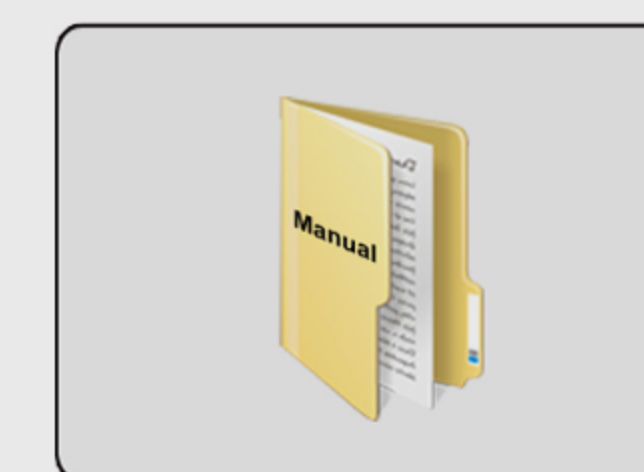

Manual

www.lilliput.com



**ZHANGZHOU LILLIPUT ELECTRONIC TECHNOLOGY CO., LTD.**  
Add : Zong Si Road, Lan Tian Economic Development Zone, Zhang Zhou, Fu Jian, 363005, China  
Tel: +86-596-2109661/2109323  
Fax: +86-596-2109611 Email: sales@lilliput.com

LILLIPUT®