




8 × 2" 1RU RACKMOUNT MONITORS

640×240 RESOLUTION 8 bit

• SDI equalization and re-clocking

RM-0208S model No.

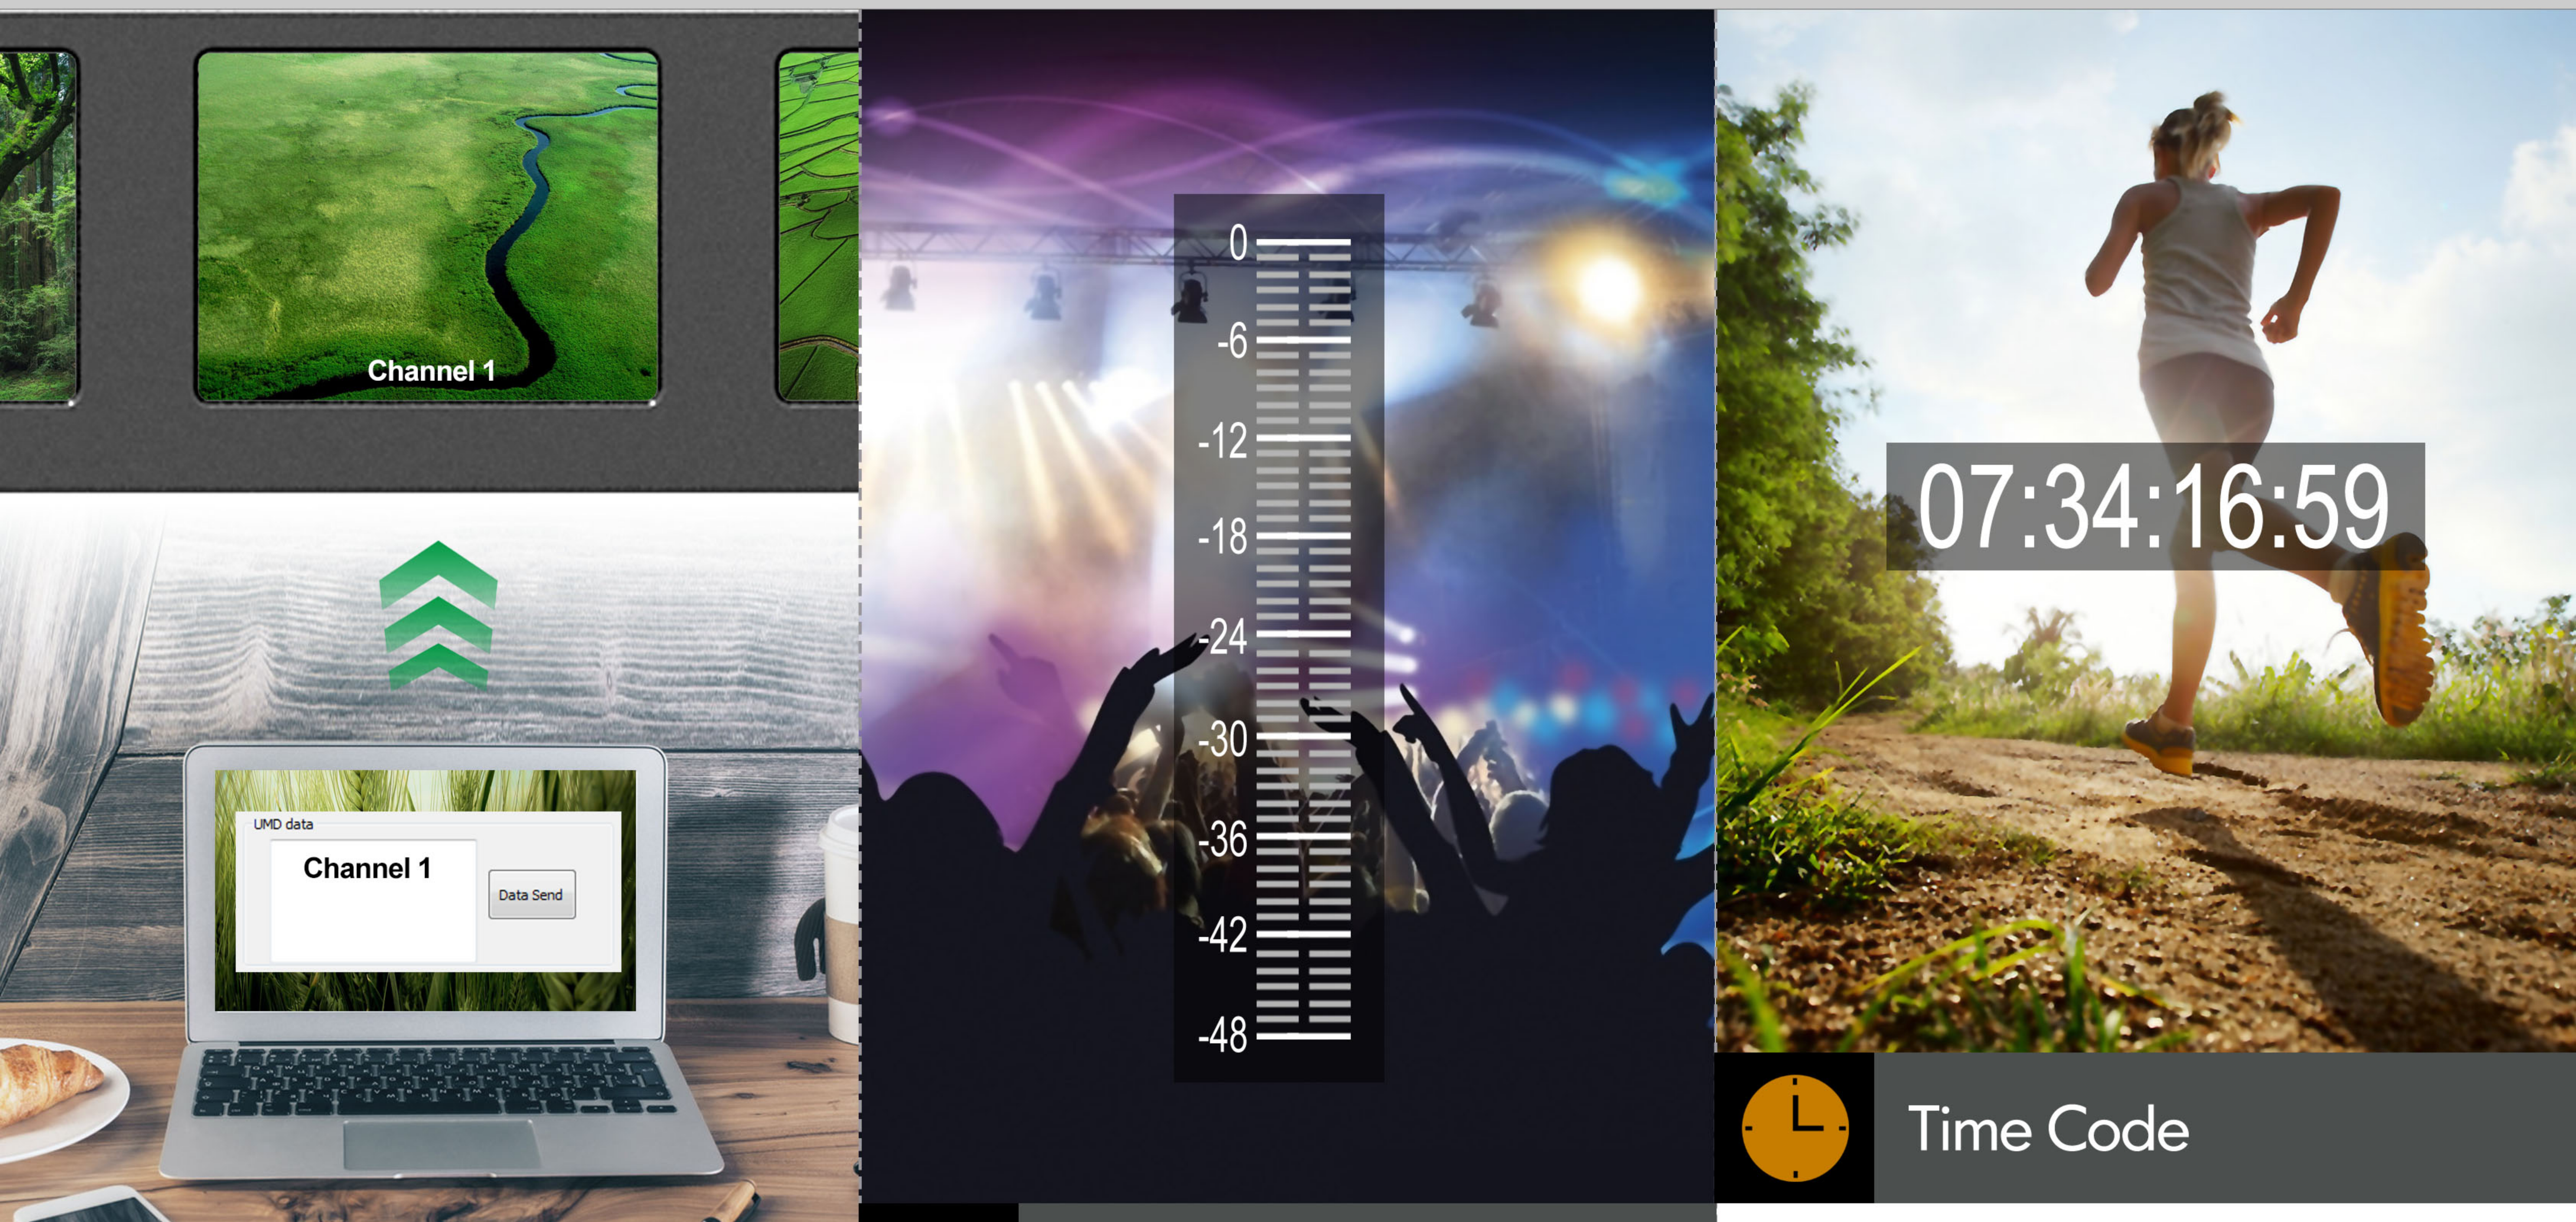

UMD UMD Switch Function

UMD character sending window can enter not more than 32 half-width characters after function activated, click Data Send button will display entered characters on the screen.

Audio Level Meter

The Audio Level Meters provide numerical indicators and headroom levels. It can generate accurate audio level displays to prevent errors during monitoring. It supports 2 tracks under SDI mode.

Time Code

It supports Linear time code(LTC) and Vertical interval time code(VITC). The time code display on Lilliput monitor is synchronizing with that of Full HD camcorder's. It's very useful for identifying specific frame in film and video production.


RS422 Smart Control

With relevant software, using laptop, PC or Mac to set and adjust functions of each monitor, such as UMD, audio level meter and time code, Even control the brightness and contrast of each monitor.



1U Rack Mount Intelligent SDI Monitoring

It has a various of mounting methods for broadcast, on-site monitoring and live broadcast van, etc. As well as setup a video wall of rack monitors in control room and see all the scenes. A 1U rack for a customized monitoring solution also can be supported for viewing from different angles and images displays.

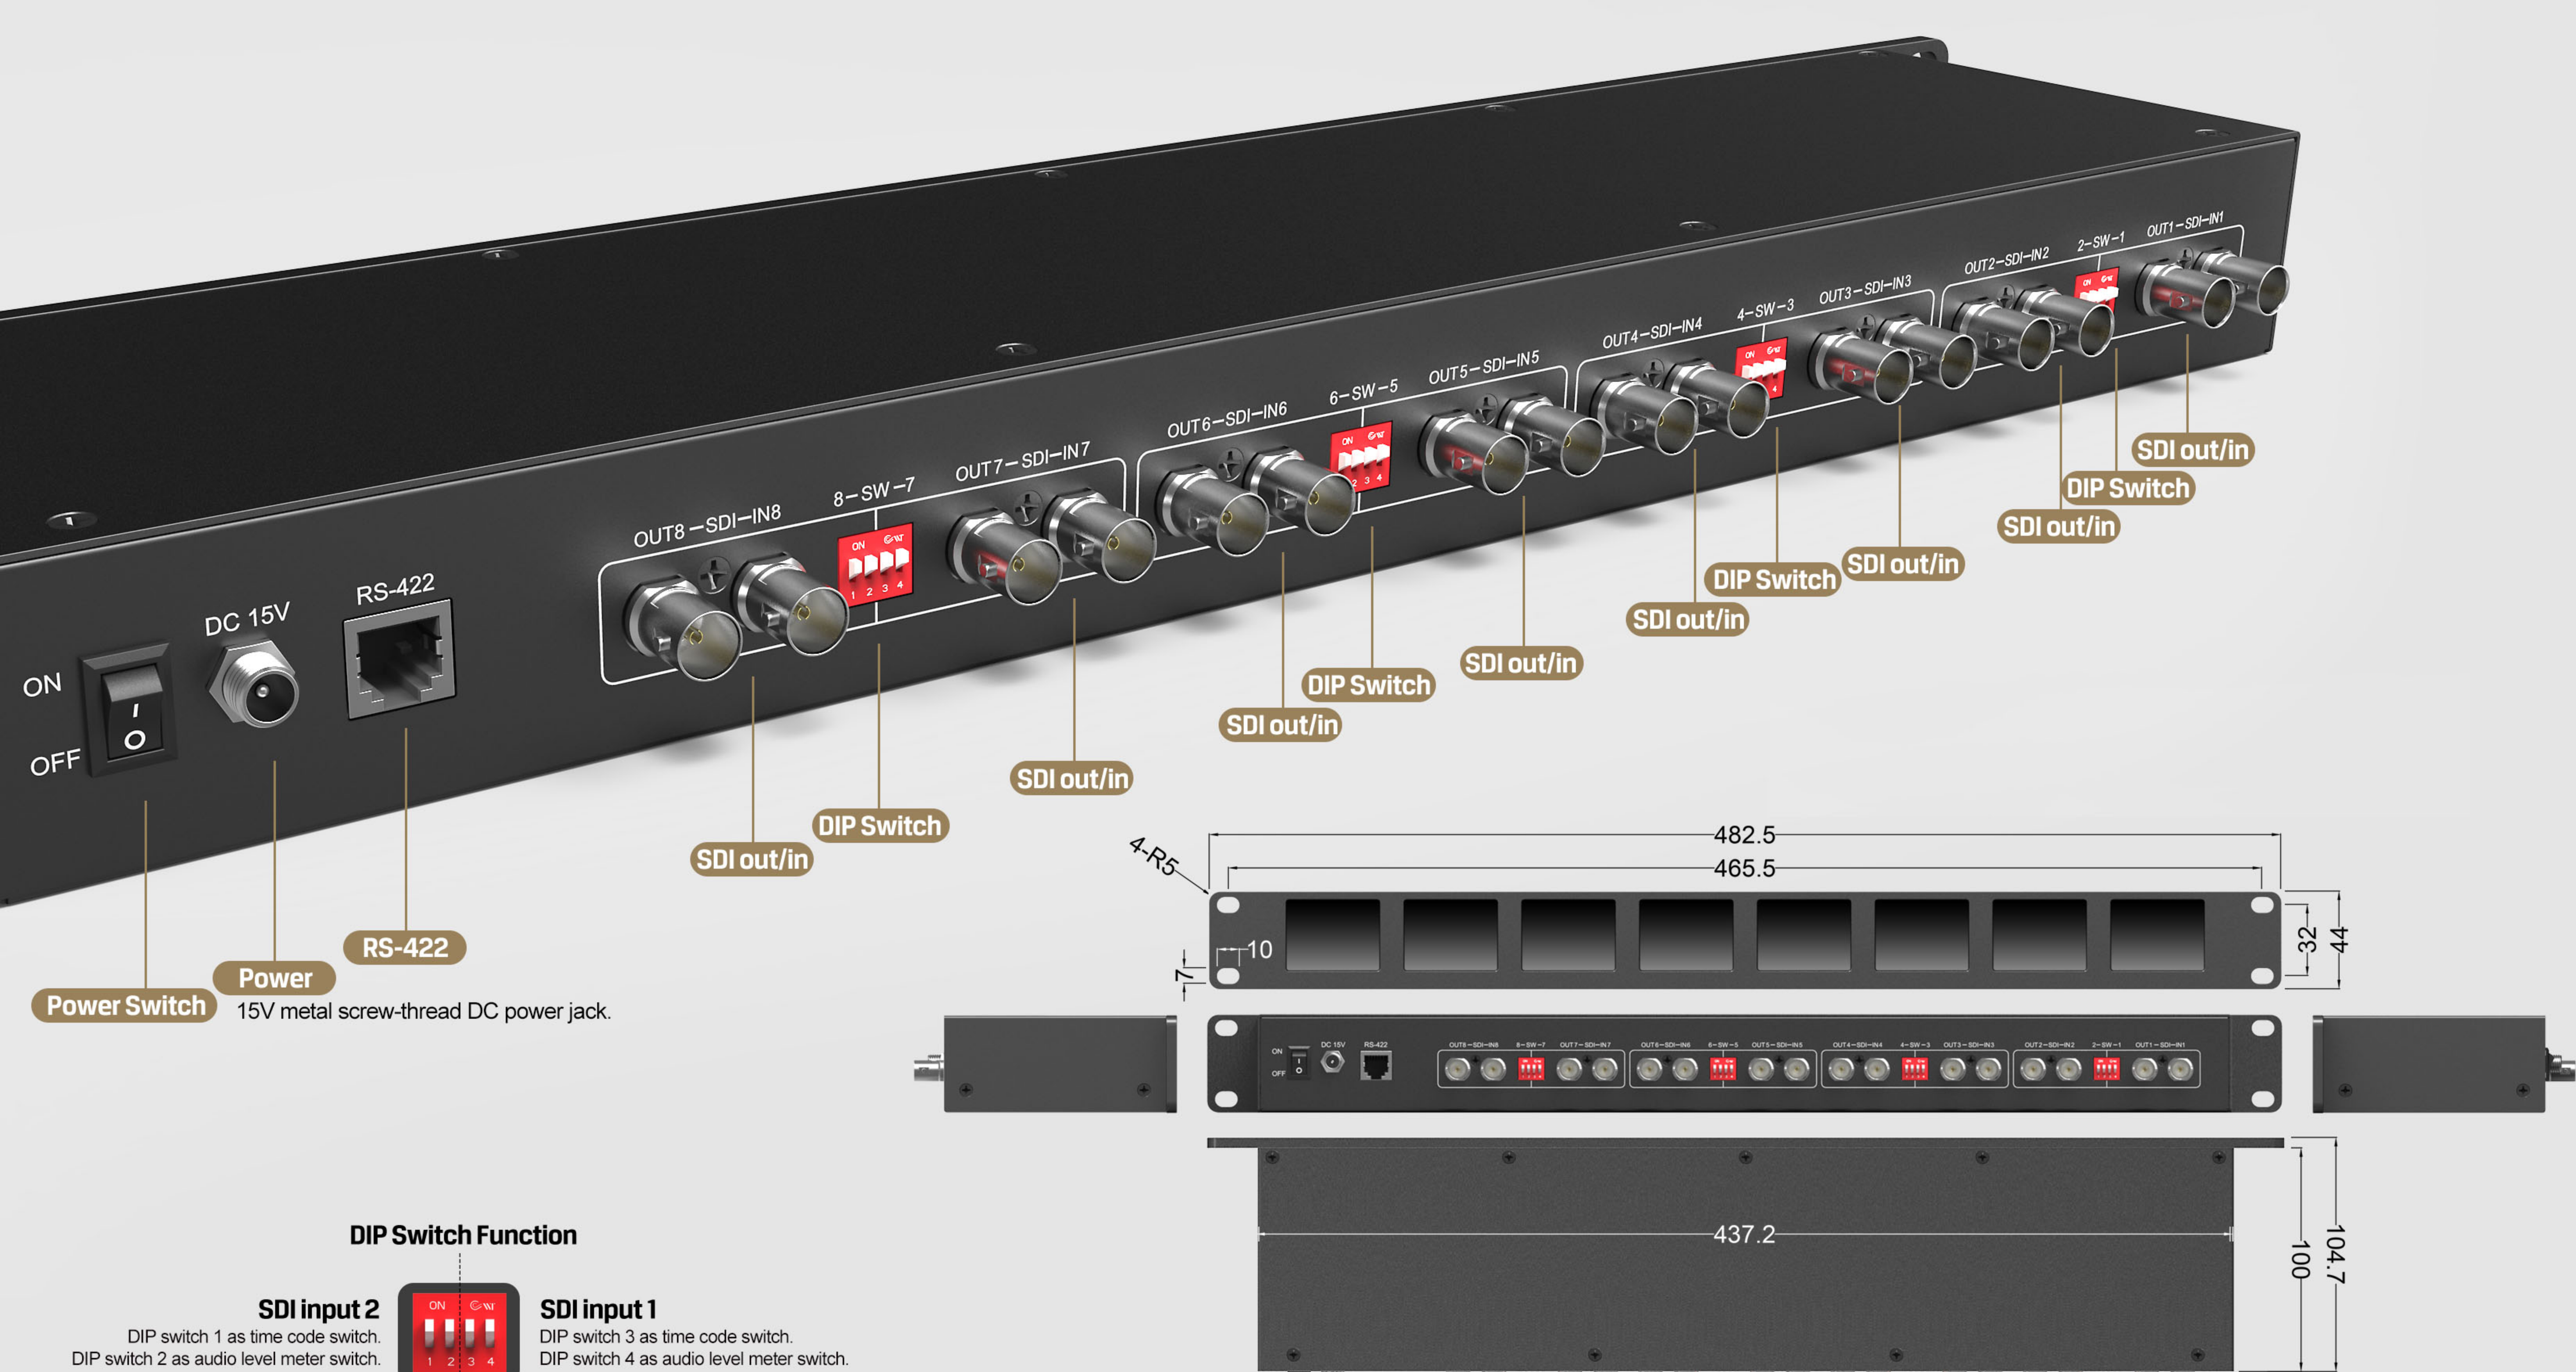

DIP Switch Function

SDI input 2 DIP switch 1 as time code switch, DIP switch 2 as audio level meter switch.

SDI input 1 DIP switch 3 as time code switch, DIP switch 4 as audio level meter switch.

SPECIFICATIONS / ACCESSORIES

DISPLAY	Panel	2" 8bit TFT LCD
	Physical Resolution	640×240, supports up to 1920×1080
	Aspect Ratio	4:3
	Brightness	250 cd/m ²
INPUT	RS422	1
	3G-SDI	8
OUTPUT	3G-SDI	8
	Current	1500mA/15V
POWER	Input Voltage	DC 12-24V
	Power Consumption	≤23W
ENVIRONMENT	Operating Temperature	-20℃ ~ 55℃
	Storage Temperature	-30℃ ~ 70℃
DIMENSION	Dimension (LWD)	482.5×105×44mm
	Weight	1555g

SDI Format	SMPTE-125M	480i(59.94)
	SMPTE-274M	1080i(60/59.94/50)
		1080p(30/29.97/25/24/24sF/23.98/23.98sF)
	SMPTE-292M	1080p(30/29.97/25/24/24sF/23.98/23.98sF)
	SMPTE-296M	720p(60/59.94/50/30/29/25/24/23.98)
		720p(60/59.94/50)
	SMPTE-372M	1080i(29.97/25/24/23.98)
		1080p(60/59.94/50/30/29.97/25/24/23.98)
	SMPTE-425M-AB	1080p(60/59.94/50)
	-Level A & Level B	720p(60/59.94/50/30/29.97/25/24/23.98)
-Level B 2x	1080i(60/59.94/50)	
ITU-R BT.656	576i(50)	

ACCESSORIES	1. 15V 2.5A DC adapter	1 piece
	2. CD drive	1 piece
	3. Manual	1 copy



Note: Due to constant effort to improve products and product features, specifications may change without notice.